



How to update SuperLine dongle - Add Module

1. Please make sure the dongle of SuperLine is plugged in.
2. If SuperLine is running, please click menu Help -> Update Dongle – Add Module.

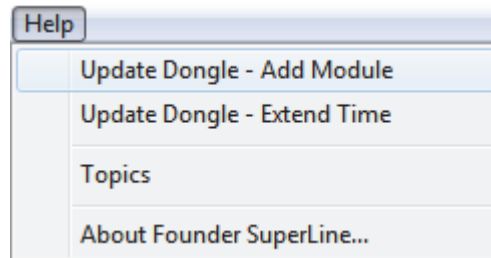

3. If you cannot run SuperLine, please go to Windows Start menu, Select All Programs -> Founder -> Founder SuperLine4.70 -> Update Dongle -> Add Module.

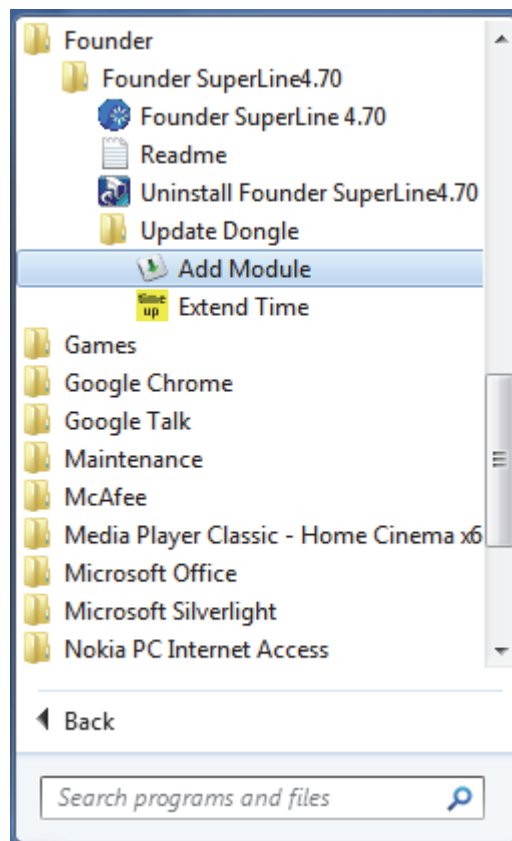

4. Click “Query” button to read the dongle, the following window will pop up.

User Update Tool

Module Information in device:

Module id	Module version	Module status
073	4.7.0.0	update

Query (Q)

Update (U)

Save (S)

Close (C)

Device status information

Global update sequence number: 0

Private update sequence number: 0

Current module/Max module: 1/16

Current error/Max error: 0/32

Device free space(Byte): 11850

Minor version: 65535

Note: When “Current error” reaches “Max error”, update function will be disabled permanently!

Device information


Device id: 95 41 62 00 00 00 30 36

5. Click **"Update"** button. The following window will pop up.




6. Select the ***.pkg** file which is sent by Founder.

7. Click **"Open"** button, then this window will pop up:

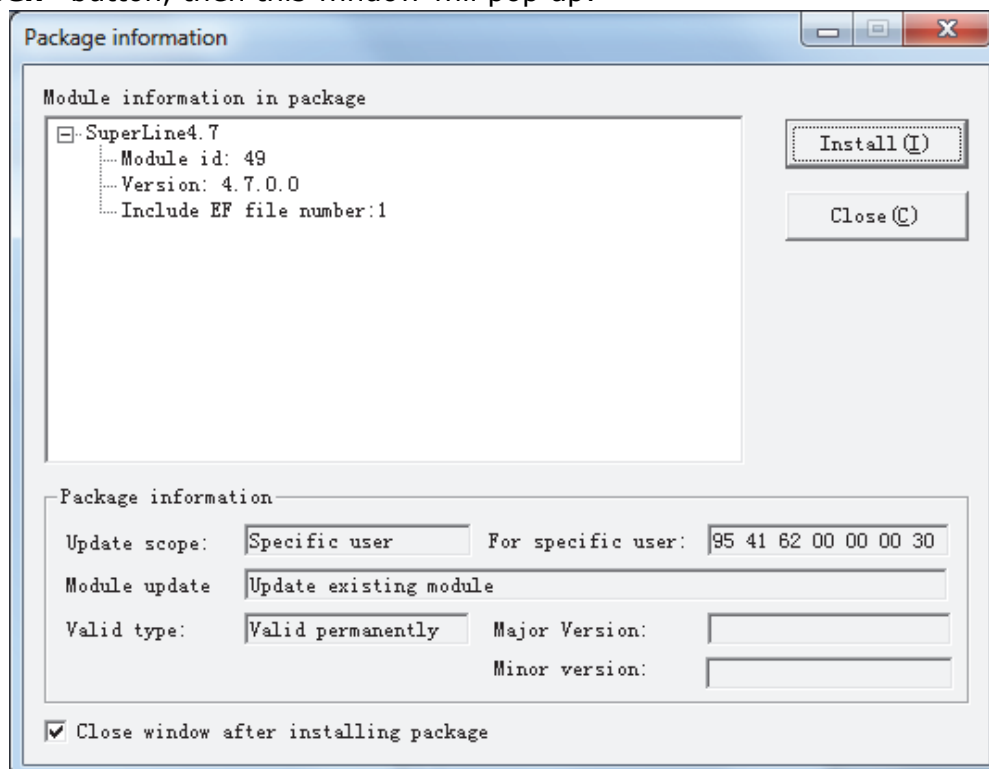

8. Click **"Install"** to add the module.
9. The following window pops up if the update is installed successfully. Click **"OK"** to close the window.

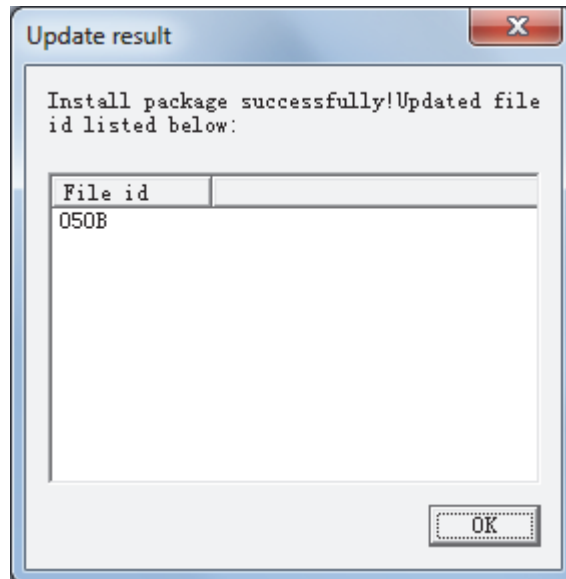

End