


How to authorize ElecRoc 6?

1. Check email and receive a Serial Number (SN);
2. Install ElecRoc server according to the guide.
3. Input the SN when the License Management Utility tool appears, and click Activate License.

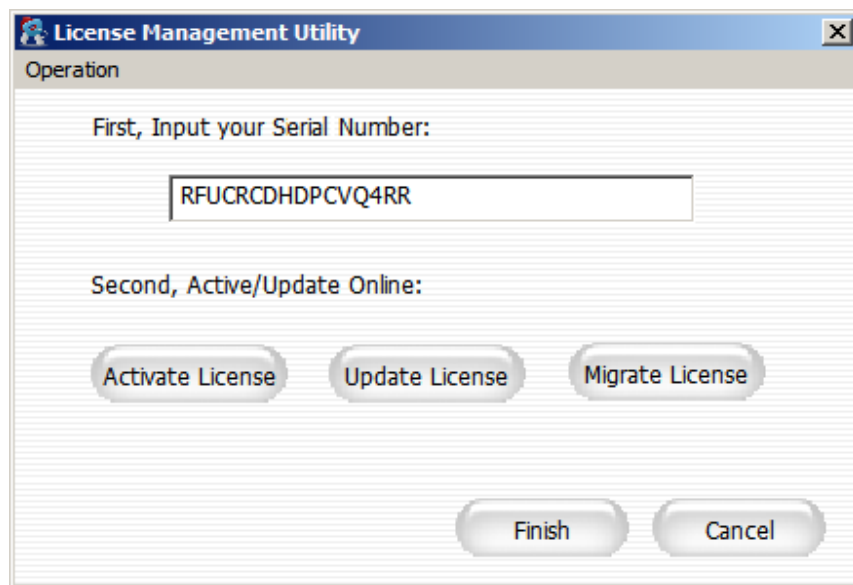

If the server is connecting to internet, select Online, and then click Activate.

License Activation

Online activation

☒ Online

The online activation may take 20 seconds, please be patient.

Serial Number:

Offline activation

☐ Offline

1. Input the SN to create a request file

Serial Number:

2. Please visit the following web site and log on using the SN, then input the request file to get an authorization file

<http://user.bitanswer.com/en/logon>

3. Import the authorization file

4. If the server locates in the local area network (LAN), setup the proxy at first from Operation\Configuration\Proxy Server;

Configuration

Proxy Server

☒ Enable Proxy Server

Address: Port:


User: Password:

Local Server IP:

☐ Use a specific IPv4 address if your server computer has more than one IPv4 address and the default one is not you want to use

IP Address: Port:

If the server doesn't connect to internet or intranet, please select Offline activation, and then refer to the GUI to activate the ElecRoc.

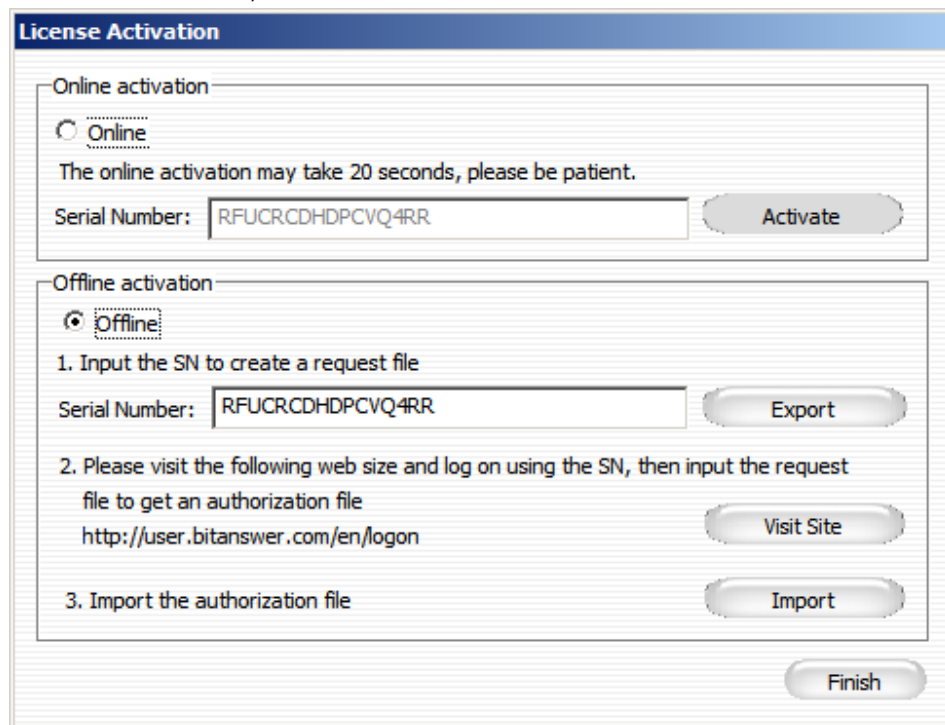

The image shows a 'License Activation' dialog box with two main sections: 'Online activation' and 'Offline activation'. The 'Online activation' section has a radio button labeled 'Online' which is currently unselected. Below it, a text box says 'The online activation may take 20 seconds, please be patient.' and a 'Serial Number' field contains the text 'RFUCRCDHPCVQ4RR'. To the right of the field is an 'Activate' button. The 'Offline activation' section has a radio button labeled 'Offline' which is selected. Below it, there are three numbered steps: 1. 'Input the SN to create a request file' with a 'Serial Number' field containing 'RFUCRCDHPCVQ4RR' and an 'Export' button; 2. 'Please visit the following web site and log on using the SN, then input the request file to get an authorization file' with the URL 'http://user.bitanswer.com/en/logon' and a 'Visit Site' button; 3. 'Import the authorization file' with an 'Import' button. At the bottom right of the dialog is a 'Finish' button.

License Activation

Online activation

☐ Online

The online activation may take 20 seconds, please be patient.

Serial Number: RFUCRCDHPCVQ4RR **Activate**

Offline activation

☒ Offline

1. Input the SN to create a request file

Serial Number: RFUCRCDHPCVQ4RR **Export**

2. Please visit the following web site and log on using the SN, then input the request file to get an authorization file

<http://user.bitanswer.com/en/logon> **Visit Site**

3. Import the authorization file **Import**

Finish

5. Click Finish.

Note:

6. Activate License is only used for the first time installation of ElecRoc server, to active the program. If you need to add processors or expand time, please click Update License.
7. One SN is only used on one computer, so please click **Migrate License** to release the SN in order to active the program on another computer.